


## Product Datasheet

### CFX1260

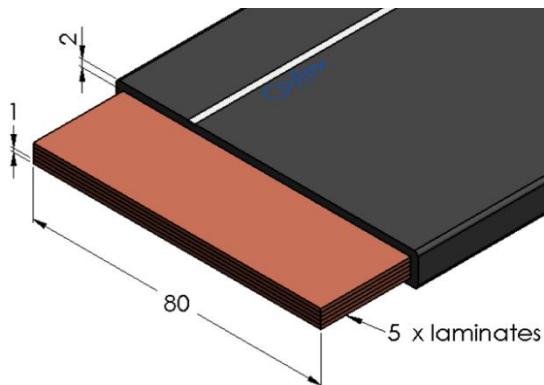

#### Main

Family	Insulated copper flexible bars	
Version	Coflex	
Standard length (m)	2	
Width (mm)	80	
Code	CFX1260	
Reference	CFX 5X80X1	
Number per package	1	
Weight (kg)	8.09	
Cross section (mm <sup>2</sup> )	400	
In (A) vs $\Delta T$	Rated Intensity (A)	Temperature rise $\Delta T$
	1038	35 °C
	1191	45 °C
	<b>1328</b>	<b>55 °C</b>
	1511	70 °C

## Technical Features

### Conductor

Electrolytic copper: Cu-ETP – EN 13599

Laminate thickness: 1 mm

### Insulation

PVC compound, Self-extinguishing UL 94-V0

Black color with white line

Thickness: 2 mm  $\pm$  0.2

Dielectric strength: 20 kV/mm

Class II according to Par. 8.4.4 IEC 61439-1

Glow-wire flammability test (GWEPT) according to standard IEC 60695-2-11:2021: 960°C

Recyclable

### Finished Product

Rated voltage: 1000 V AC/1500 V DC

Working temperature: -40 °C to 105 °C

Compliant with standard IEC 61439-2

### In vs. $\Delta T$

$I_n$  = Rated current A

$\Delta T$  = Temperature rise °C

$\Delta T = T_f - T_a$

$T_f$  = Working temperature °C

$T_a$  = Room temperature °C

Table of ampacities (A) are based on temperature rise  $\Delta T$  as per **IEC 61439-1** with reference room temperature of 35°C.

For derating coefficient for the use of bars in parallel please refer to the catalogue.

Please contact Teknomega for non-specified tolerances.