


Datasheet:

PTB3611 - Power terminal block, 1 pole, 1x Al/Cu 300mm², Grey

PTB3612 - Power terminal block, 1 pole, 1x Al/Cu 300mm², Blue

PTB3613 - Power terminal block, 1 pole, 1x Al/Cu 300mm², Yellow/Green

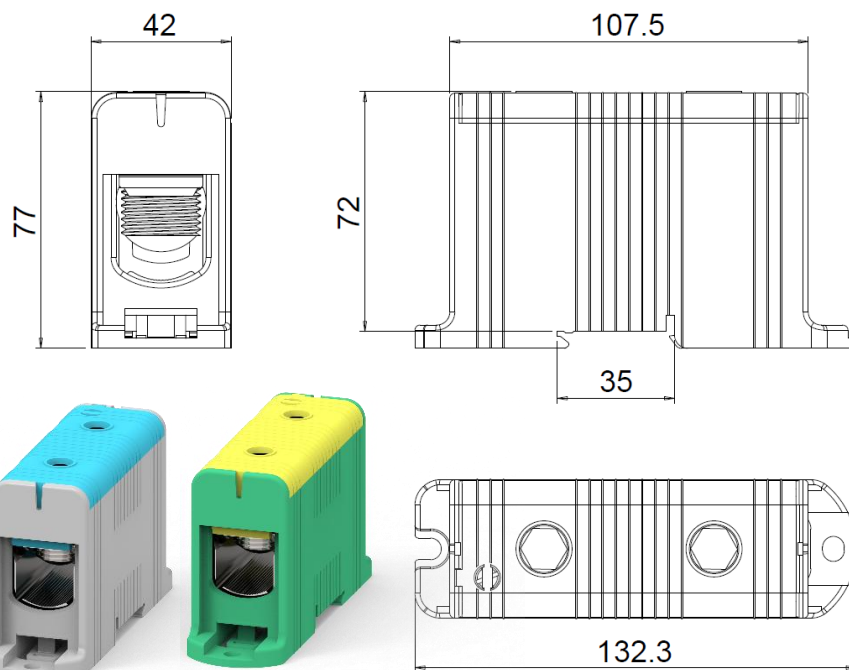

Family	Power Terminal Blocks		
Version	1 Pole, 2 conductors		
Code	PTB3611	PTB3612	PTB3613
Reference	PTB-1-300-G	PTB-1-300-B	PTB-1-300-Y
Colour			
Number per package	1		
Sect. Cu (mm²)	35÷300	Sect. Al (mm²)	35÷300
I_{th} Cu (A)	520	I_{th} Al (A)	440
I_{cw} (kA) @1s	36	I_{pk} (kA)	75,6
U_i	1000Vac/1500Vdc	U_{imp}	8kV
Pollution Degree	PD 3	Comparative tracking index (V)	600
Weight (Kg)	0,45		
Continuous working temp.	Max +85°C		

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Technical Features

Insulating body: PA 66, UL 94-V0

Conductor: tinned aluminium


Screws: galvanized steel

Index protection: IP10


Compliant with standards EN 60947-7-1 and EN 61238-1-1

Instruction

35 mm DIN-rail installation:




To install, get the power terminal block on the DIN-rail and push

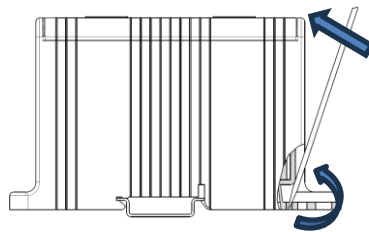

To remove, use a flat screwdriver to release the clip and lift the connector


Panel installation:

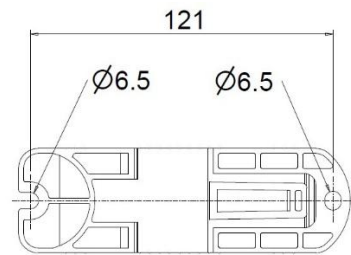

Use M6 screws


Cable connection:

The terminal is pre-greased. No additional grease is required on the cable

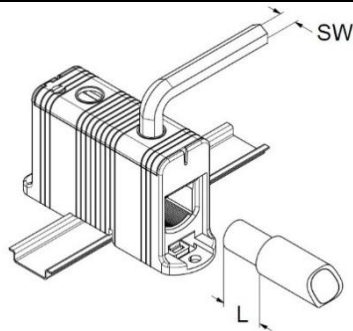

Stripping length L	56 mm
Hex SW	12 mm
Tightening torque ⁽¹⁾	35÷150 mm ² 30 Nm
	185÷300 mm ² 60 Nm

Before connecting the auxiliary cable, remove the plastic protections

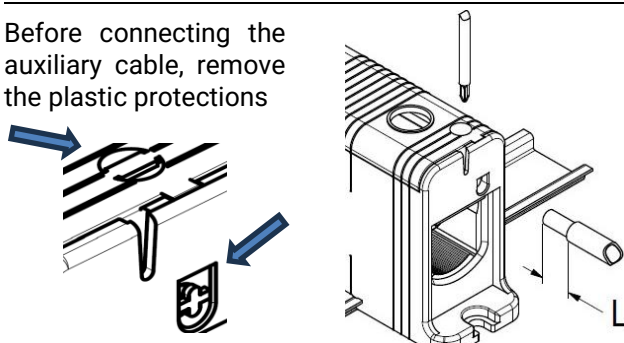

Stripping length L	10 mm
Screw	M4
Tightening torque	1,5÷10 mm ² 1,2 Nm

1. When mounted on DIN-rail, support the terminal block or use the Teknomega end-stoppers DIN1305.
2. All the operations must be carried out by qualified personnel following the applicable national regulations for electrical installations.